




VENTLESS HOODS FOR VGG SERIES ROTISSERIES – REPLACEABLE FILTERS

Series: VGH

EQUIPMENT DIMENSIONS

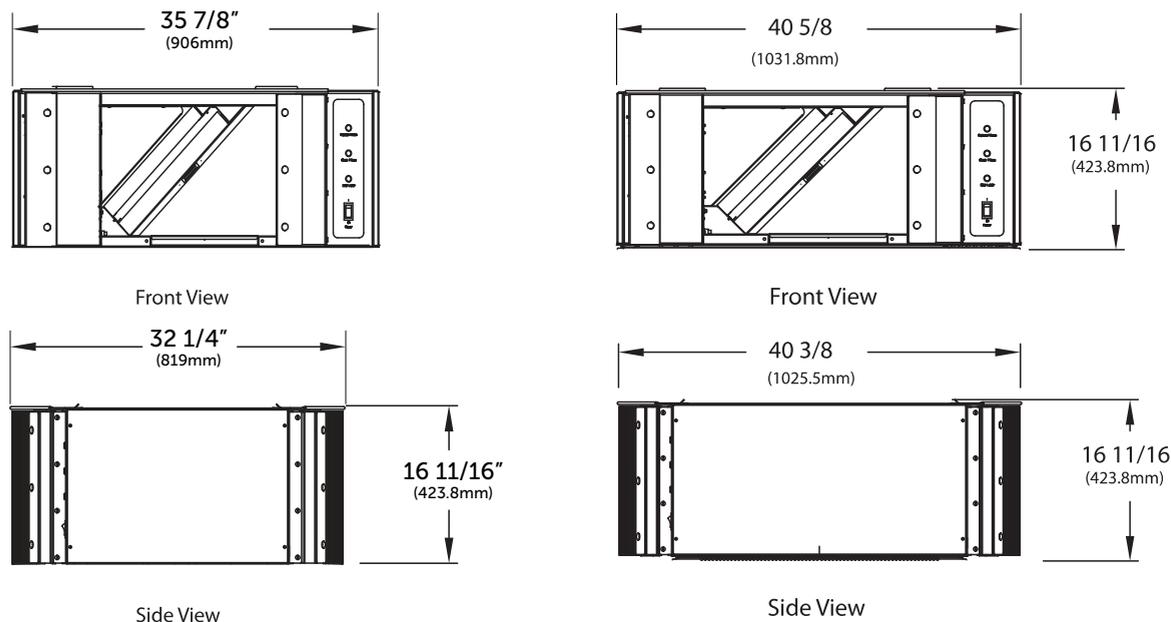

MECHANICAL SPECIFICATIONS

Dimension	VGH-5	VGH-8
Height	16 11/16" (424 mm)	16 3/4" (425mm)
Width	35 7/8" (906 mm)	40 5/8" (1032mm)
Depth	32 1/4" (819 mm)	40 3/8" (1026mm)
Floor Space	8.0 sq ft (0.74 sq m)	10.6 sq ft (.98 sq m)
Weight	150 lb (68 kg)	180 lb (82 kg)

MOUNTING OPTIONS

- Can be mounted to VGG-5 or VGG-8 rotisserie ovens at the factory or in the field
- Must be mounted to VGG-16 oven in the field
- May be retrofitted in the field at a later date


ELECTRICAL OPTIONS

Volts	Amps*	Phase
208 - 240	1	1

• Must be added to the VGG (rotisserie) rated amps to correctly size full load amperage of combined unit.

NOISE LEVEL

Noise Level | 58 decibels

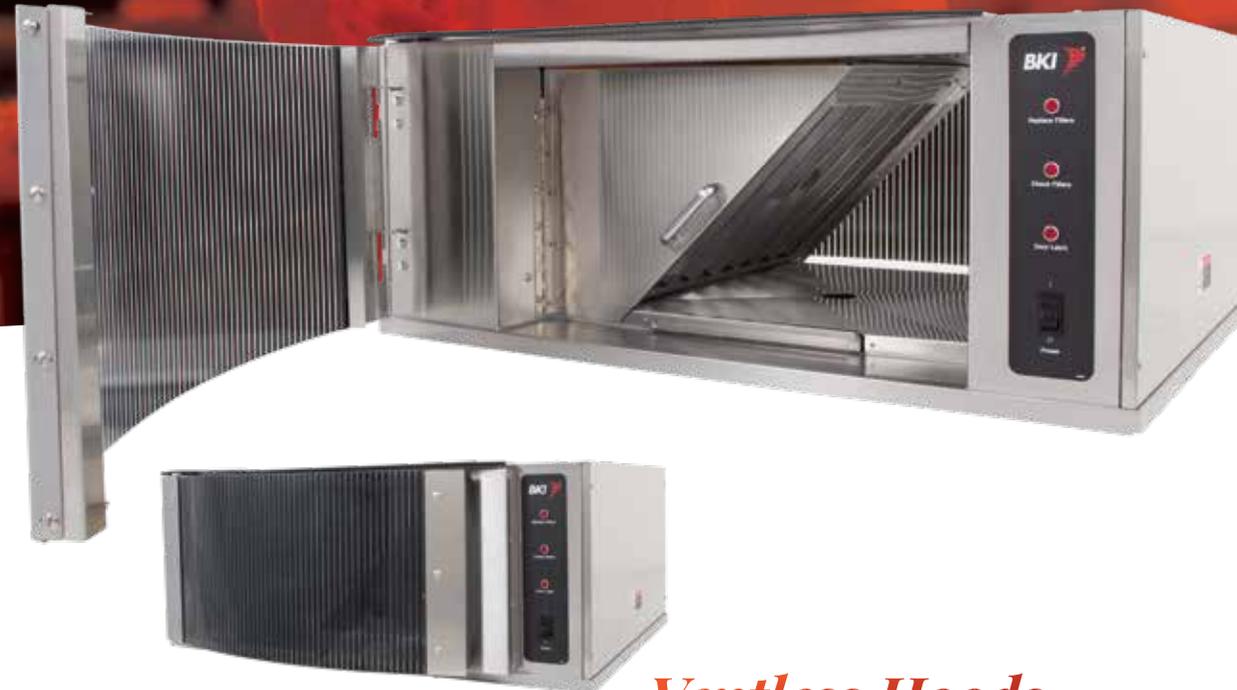

*Ventless Hoods
For Rotisseries*

SERIES: VGH




bkideas.com

© BKI LI0283C/08-06
Specifications are subject to
change without notice.

BKI
42 Allen Martind Drive
Essex Junction, VT 05452
Telephone: (802) 658-6600

Visit bkideas.com to view all accessories for
this model.



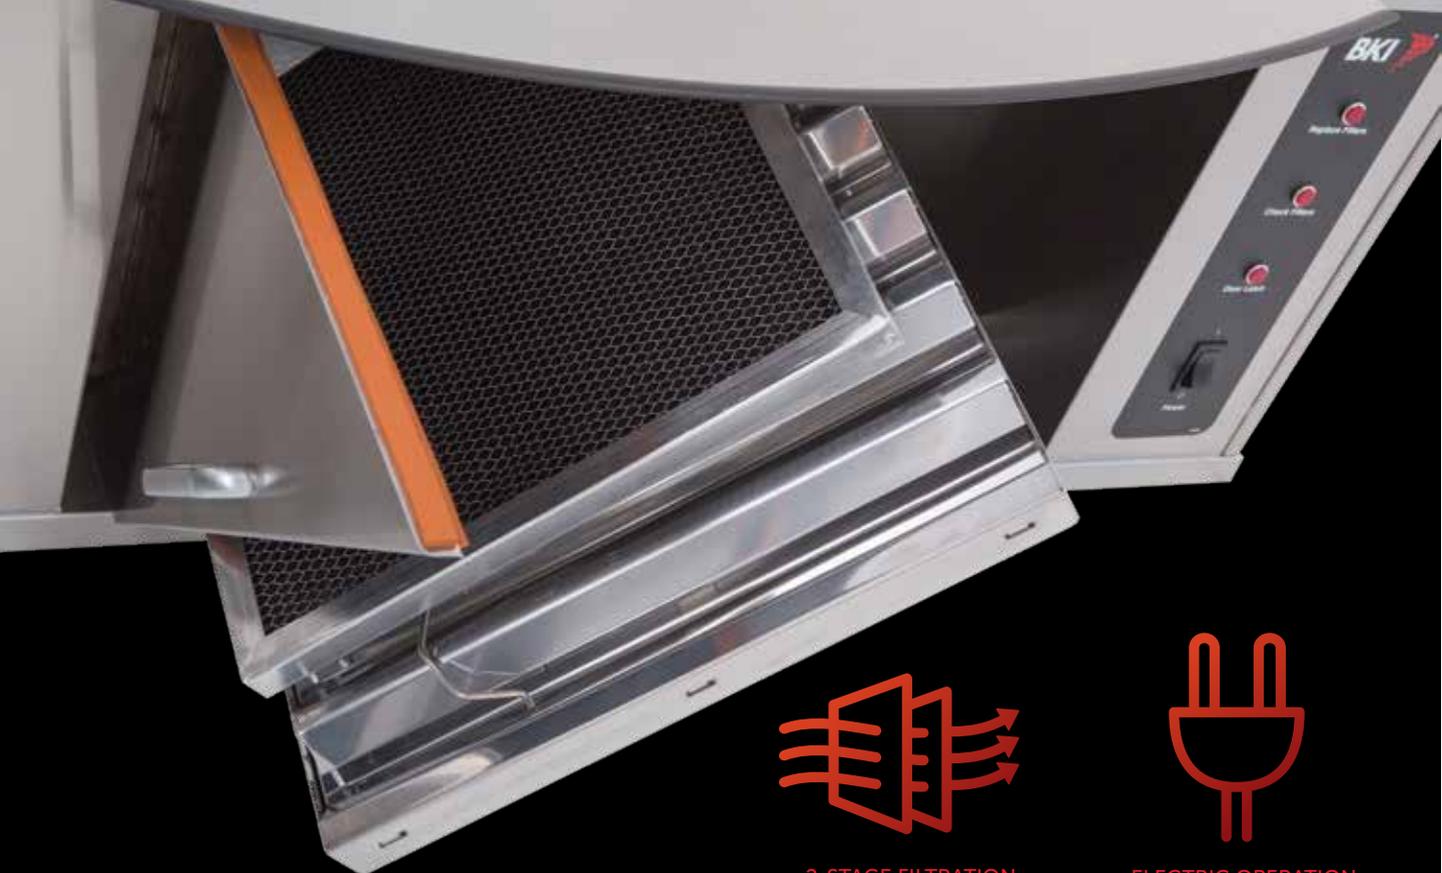

2-STAGE FILTRATION

Our patented 2-stage filtration eliminates virtually all airborne grease particles.



ELECTRIC OPERATION

Energy efficiency and easy installation are a perfect pairing for your foodservice operation.



Clearing The Air.



Wish you could have all the rewards of a rotisserie but without the nasty, greasy air? Wish you could have the clean air without the extensive ductwork the EPA requires?

Self-contained and free of expensive ductwork, the BKI® VGH series of vent-less hoods are the answer to your prayers. An advanced two-stage filtration process removes virtually all the grease from the VGG series rotisserie ovens. The VGH-8 vent-less hood can be paired with the BKI VGG-8 or VGG-16 rotisserie ovens, while the VGH-5 vent-less hood is designed for the VGG-5 rotisserie ovens.

This unit meets the current Environmental Protection Agency (EPA) 202 testing standards. You don't ever have to worry about dropping the ball, either. A forced maintenance system utilizes signal lights on the unit to alert the operator to check filter placement, replace dirty filters, and latch the hood doors. To avoid unsafe conditions, the VGG oven will shut off automatically if a hood door is opened, a filter is removed, or if the power is turned off.

FEATURES AT A GLANCE

- Two-stage filtration keeps grease-laden particles from returning to the air
- Signal light alerts operator to replace dirty filters, check filter placement, and latch doors
- Safety shut-off if hood door/filter is ajar or hood power is cut off

Filters are available in fiberglass or high carbon for the ultimate filtration of grease particles.

Assembled in USA, the VGH-8 is constructed to stand up to heavy use and provide a long service life.

Call or visit our website to learn more about our innovative cooking equipment.

802.658.6600 | www.bkideas.com